
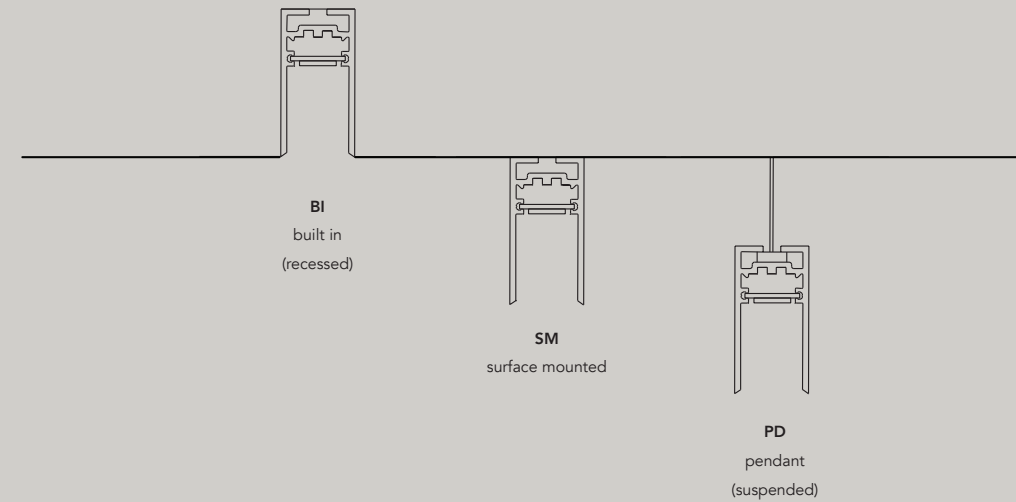
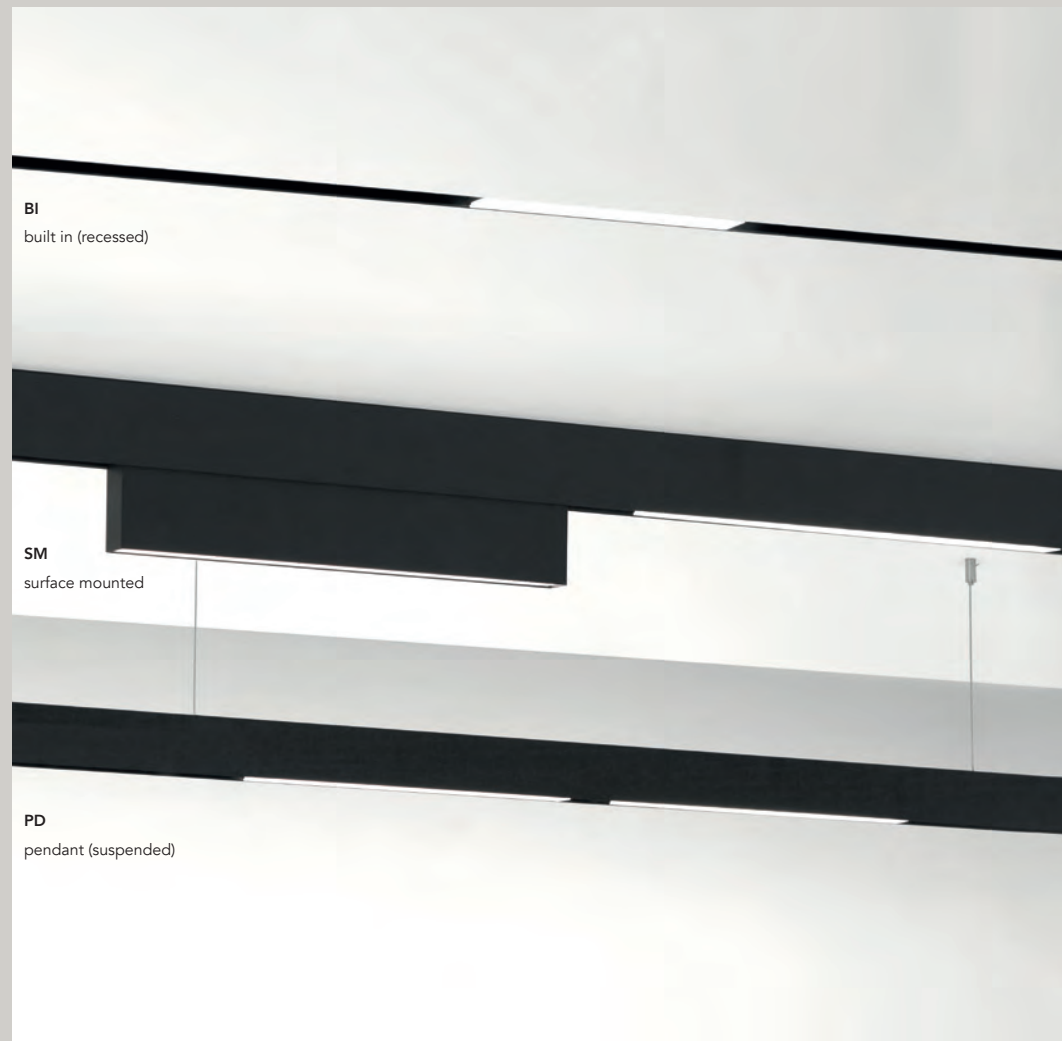


# line


material aluminium coated  
 weight 1,75 kg/lm - 1,16 lb/feet  
 voltage 24Vdc  
 max wattage 240W on single circuit  
 circuits 2  
 dimming 1-10V / 0-10V / Dali  
 certifications CE  EneC  
 classifications IP20 




## L.L.C.T

Length	<b>4000</b> <b>300 - ...</b>	standard length in mm custom length in mm
Color body	<b>BK</b> <b>WH</b> <b>AL</b>	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)
Type mounting	<b>BI</b> <b>SM</b> <b>PD</b>	built in (recessed) surface mount pendant (suspended / standard cable of 2m included)



Brackets




standard bracket  
(included with BI)



L.BI.MB  
(option)

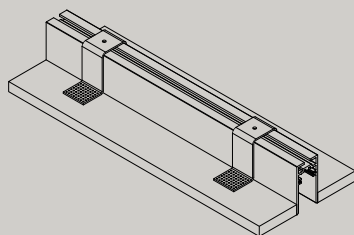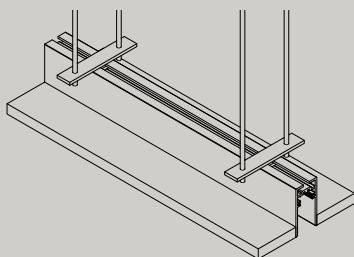


Connectors






L.MC.90°  
(standard)

L.MC.X°  
(custom)





L.MC.  
CROSS



L.MC.ST




L.MC.T



Round Corner

- L.CORN.RND.WH
- L.CORN.RND.BK



End Cap

- L.EC.WH
- L.EC.BK
- L.EC.AL



Pendant Extension Cable


PD.EC.8M

L.CP.L.C

Cover profile

Length	<b>1000</b>	1000 mm - 39,37 in
	<b>2000</b>	2000 mm - 78,74 in
	<b>4000</b>	4000 mm - 157,48 in

Color	<b>BK</b>	black matt ral 9011
	<b>WH</b>	white matt ral 9016
	<b>AL</b>	aluminium color ral 9006 (on request only)




power supply ceiling box (only for surface mounted version)

PSCB.BK	color black
PSCB.WH	color white



310x100x50 mm  
12,20x3,93x1,96 in

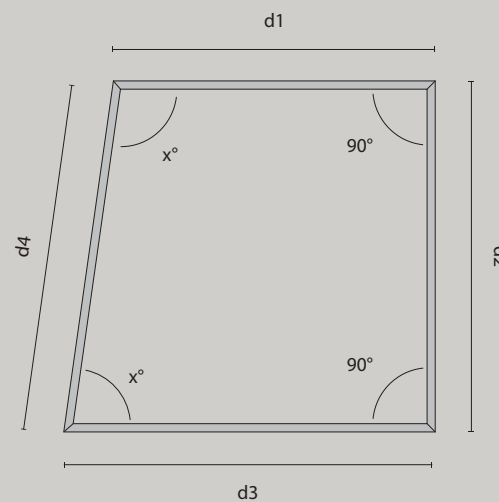

Mention the outside dimensions of the tracks and the inner corners