


°out

material aluminium coated
 weight 450gr / 0.99lb
 voltage 24Vdc
 cri >90
 wattage 16,5W
 dali supported (option) DALI DT8, tunable white
 certifications CE, ENEC
 classifications IP20

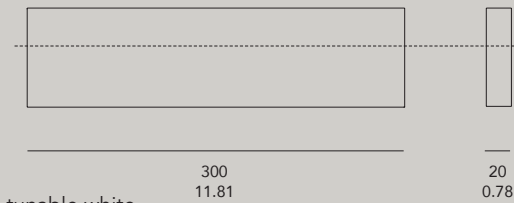


°out (FI)

OUT.L.C.D.V.D

Led	WW	2700K 16,5W		
	WW2	3000K 16,5W		
	NW2	4000K 16,5W		
	TW	tunable white (only with IC) 18W 2200-6500°K		
Color body	BK	black matt ral 9011		
	WH	white matt ral 9016		
	AL	aluminium color ral 9006 (on request only)		
Diffuser	FI	strip frosted ice	WW	1100 lm / 600 cd
			WW2	1100 lm / 600 cd
			NW2	1100 lm / 600 cd
			TW	
	MP	strip microprism (anti-glare)	WW	1100 lm / 600 cd
			WW2	1100 lm / 600 cd
			NW2	1100 lm / 600 cd
			TW	
	SF	solid frosted	WW	1100 lm / 275 cd
			WW2	1160 lm / 290 cd
			NW2	1220 lm / 305 cd
			TW	
SC	solid clear	WW	930 lm / 395 cd	
		WW2	980 lm / 415 cd	
		NW2	1030 lm / 435 cd	
		TW		
SCE	solid clear with custom etched front (300x50mm)	WW	930 lm / 395 cd	
		WW2	980 lm / 415 cd	
		NW2	1030 lm / 435 cd	
		TW		
Version	T	track mount		
	BI	built in monopoint (plasterkit required)		
Dimming	IC	fixtures individually dimmable, controlled by DALI DT8 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
	OC			
Accessories	PL.300	monopoint plasterkit 300 mm		
	OUT.FI	interchangeable frosted ice diffuser		
	OUT.MP	interchangeable microprism diffuser		



°out with solid clear diffuser with custom etched front (SCE)

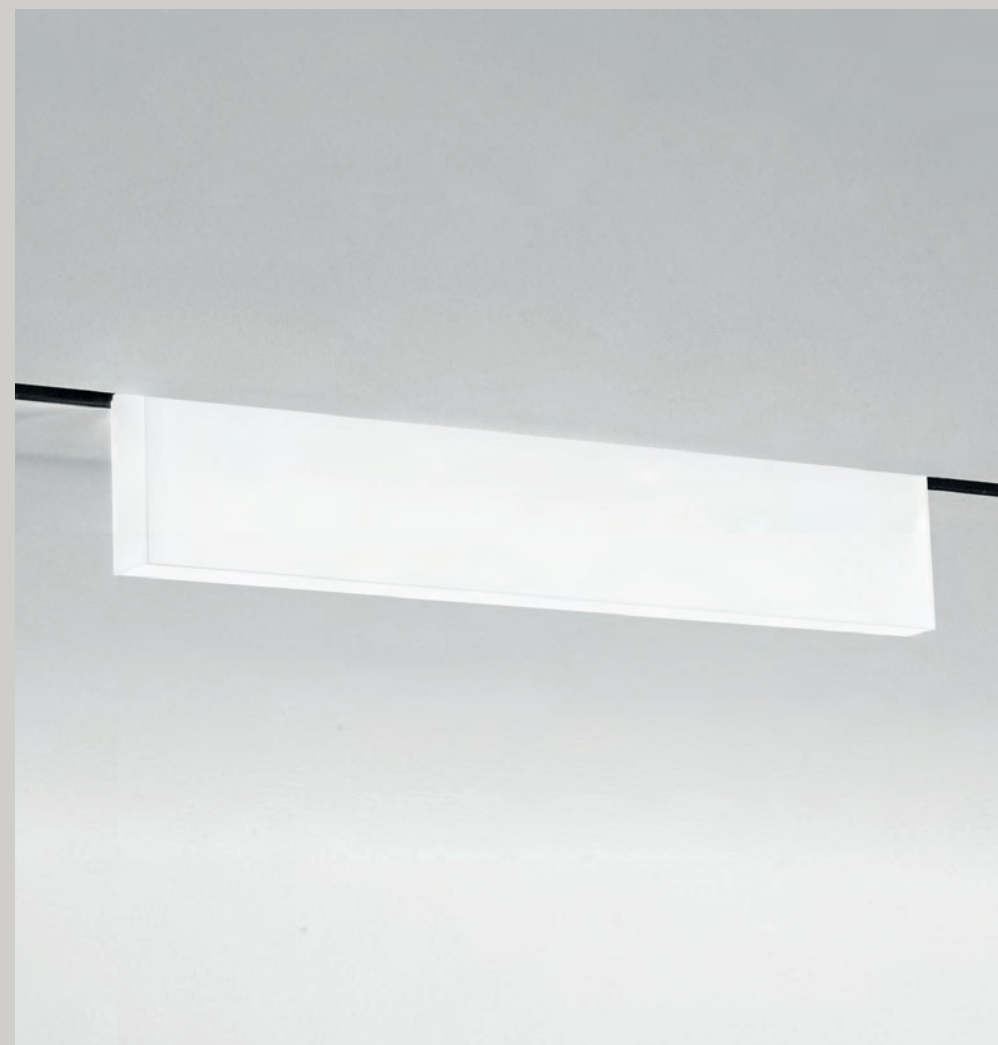

°out with solid frost diffuser (SF)