


# turn



material aluminium coated  
 weight 380gr / 0,83lb  
 voltage 24Vdc  
 cri >90  
 wattage 9,6W  
 dali supported (option) DT6  
 rotation 355°  
 inclination 90°  
 certifications CE, ENEC  
 classifications IP20

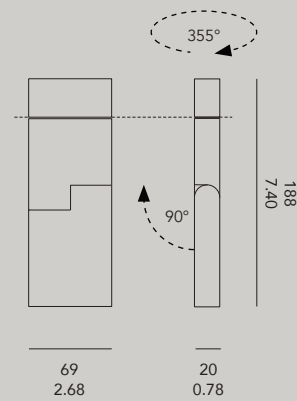


## TURN.L.C.B.V.D

Led	<b>WW</b>	2700K   9,6W		
	<b>WW2</b>	3000K   9,6W		
	<b>NW2</b>	4000K   9,6W		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Beam	<b>FI</b>	frosted ice diffuser (wide beam)	WW	750 lm / 2700 cd
			WW2	790 lm / 2820 cd
			NW2	830 lm / 2900 cd
	<b>MP</b>	microprism diffuser (wide beam & anti-glare)	WW	680 lm / 1100 cd
			WW2	735 lm / 1665 cd
			NW2	770 lm / 1765 cd
	<b>25</b>	optic 25°	WW	485 lm / 180 cd
			WW2	510 lm / 190 cd
	<b>40</b>	optic 40°	NW2	535 lm / 200 cd
			WW	485 lm / 180 cd
			WW2	510 lm / 190 cd
		NW2	535 lm / 200 cd	
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT6 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
	<b>OC</b>			
Accessories	<b>PL.70</b>	monopoint plasterkit 70 mm		
	<b>TURN.25</b>	interchangeable additional optics 25°		
	<b>TURN.40</b>	interchangeable additional optics 40°		
	<b>TURN.FI</b>	interchangeable frosted ice diffuser		
	<b>TURN.MP</b>	interchangeable microprism diffuser		

# °turn plus NEW

material aluminium coated / PC  
 weight 450gr/0,99lb  
 voltage 24Vdc  
 cri 92  
 wattage 13W  
 dali supported DT6 (option)  
 rotation 355°  
 inclination 90°  
 certifications CE   
 classifications IP20 

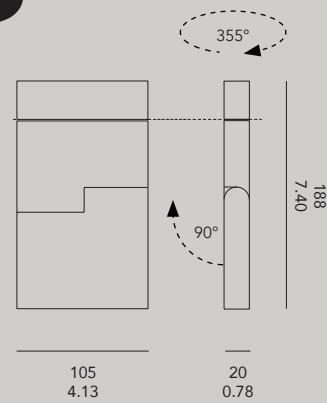


## TURN.PL.L.B.O.V.C

Led	<b>WW</b>	2700K   13W		
	<b>WW2</b>	3000K   13W		
	<b>NW2</b>	4000K   13W		
Body color	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Optics	<b>10</b>	optic 10°	WW	855 lm / 21400 cd
			WW2	940 lm / 23700 cd
			NW2	960 lm / 24750 cd
	<b>25</b>	optic 25°	WW	680 lm / 2580 cd
			WW2	720 lm / 2700 cd
			NW2	755 lm / 2835 cd
	<b>35</b>	optic 35°	WW	528 lm / 1540 cd
			WW2	690 lm / 1600 cd
			NW2	725 lm / 1680 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Control	<b>IC</b>	individually controlled fixture by DALI DT6		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.105</b>	monopoint plasterkit 105 mm		

# °turn sora

NEW


material aluminium coated  
 weight 380gr  
 voltage 24Vdc  
 cri 95  
 wattage 10 / 16W  
 dali supported (no 0-10V dimming, only DALI)  
 rotation 355°  
 inclination 90°  
 certifications CE  
 classifications IP20 

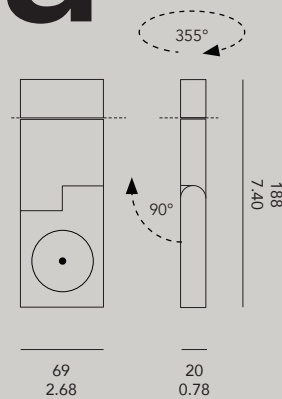

## TURN.SO.L.B.V.C


Led	<b>10-27</b>	10°, 2700K, SNAP compatible, max. 10W
	<b>10-30</b>	10°, 3000K, SNAP compatible, max. 10W
	<b>10-40</b>	10°, 4000K, SNAP compatible, max. 10W
	<b>15-27</b>	15°, 2700K, SNAP compatible, max. 16W
	<b>15-30</b>	15°, 3000K, SNAP compatible, max. 16W
	<b>15-40</b>	15°, 4000K, SNAP compatible, max. 16W
Body color	<b>BK</b>	black matt ral 9011
	<b>WH</b>	white matt ral 9016
	<b>AL</b>	aluminium color ral 9006 (on request only)
Version	<b>T</b>	track mount
	<b>BI</b>	built in monopoint (plasterkit required)
Control	<b>IC</b>	individually controlled fixture by DALI DT6
	<b>OC</b>	track overall controlled (if provided), no dimming possible
Accessories	<b>PL.70</b>	monopoint plasterkit 70 mm

# Snap system for turn soraa

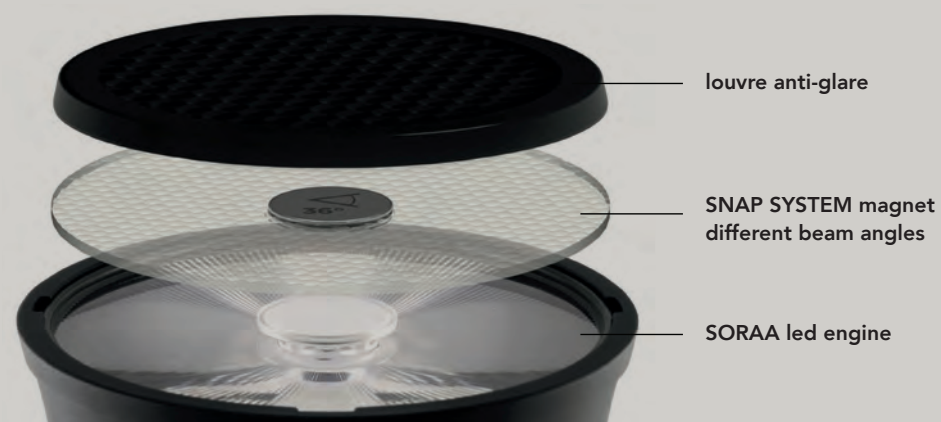


Soraa has developed an optical system that is optimized around its breakthrough GaN-on-GaN™ LED technology. The result is directional light with near perfect light distribution, exquisitely uniform color and smooth, artifact free transitions. The optical light engines deliver intensity normally associated with substantially larger diameter sources. Beam angles range from narrow spot to flood and can be combined with the SNAP System accessories to change light distribution and light color on site.

The SNAP SYSTEM's self-centering magnetic interconnect system makes using accessories completely user friendly. Simply attached the SNAP SYSTEM accessory directly to the led engine, the magnetic force from both the accessory and lamp will securely attached to one another and center itself. The accessories can be stacked in combination. For example, a beam spreader can be used in combination with CCT shifter.

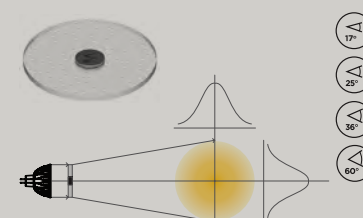


Use in any application where reducing the number of beam angle SKUs is required. Provides maximum flexibility up to the time of installation.

- TURN.SO.17** SNAP beam spreader 17°
- TURN.SO.25** SNAP beam spreader 25°
- TURN.SO.36** SNAP beam spreader 36°
- TURN.SO.60** SNAP beam spreader 60°

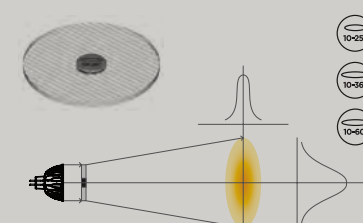


Use in wall washes and illuminating asymmetric objects. Reduces required number of light fixtures and spill.

- TURN.SO.1025** SNAP linear 10°x 25°
- TURN.SO.1036** SNAP linear 10°x 36°
- TURN.SO.1060** SNAP linear 10°x 60°

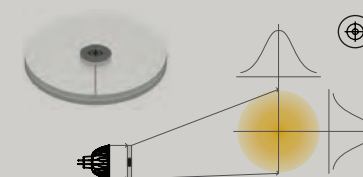


Designed with two lenses the AIM snap bends the beam from 0 degree to maximum deflection angle of 20 degrees, while maintaining uniform and consistent color and shape.

- TURN.SO.AIM** deflection angle of 20°

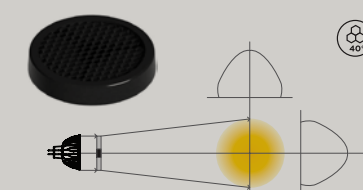

Eliminates high angle glare, making light beams disappear in downlight applications.

- TURN.SO.LOUVRE** SNAP anti-glare louvre

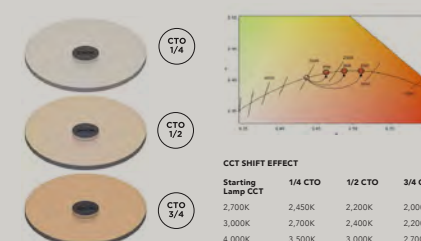

Use in hospitality and restaurant applications to simulate warm dimming. Create custom colors for festive occasions or brand identity.

- TURN.SO.CS.1/4** SNAP color shift small
- TURN.SO.CS.1/2** SNAP color shift medium
- TURN.SO.CS.3/4** SNAP color shift large